

MASS

 DOWNLIGHT
EMPOTRAR / TECHO
RECESSED DOWNLIGHT / CEILING

100-277 Vca
50/60 Hz



CRI
>80

EPISTAR

50 000 hrs
Vida útil

IP
20

ALUMINIO

G ●

7 W 822 Lm 3000 K
Cálido

● **MLA73** 

● **MLA730** 

● **MLA73C** 

7 W 904 Lm 4000 K
Neutro


● **MLA74** 

● **MLA740** 

● **MLA74C** 



60 mm



55 mm

50 mm

15 W 1700 Lm 3000 K
Cálido

● **MLA153** 

● **MLA1530** 

● **MLA153C** 

15 W 1840 Lm 4000 K
Neutro


● **MLA154** 

● **MLA1540** 

● **MLA154C** 



65 mm



70 mm


50 mm

Diseño que favorece la
disipación de calor




Aluminio que permite una
vida útil más larga

Emisión de luz controlada
para un mejor confort visual

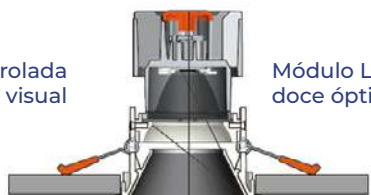

Módulo LED con lentes para
doce ópticas disponibles

Cut-off
40°
Glare comfort
cut off
63°



ÓPTICAS
DISPONIBLES:
AVAILABLE
OPTICS:

AAMLA15
● Óptica 15°

AAMLA24
● Óptica 24°

AAMLA60
● Óptica 60°

SOCKET PARA
GU10:
GU10 SOCKET:



MLAGU10