

# UNAX



DOWNLIGHT  
EMPOTRAR / TECHO  
RECESSED DOWNLIGHT / CEILING

100-277 Vca  
50/60 Hz



CRI  
>90

**CREE**

50 000 hrs  
Vida útil

IP  
20

ORIENTABLE 65°

DIRIGIBLE 360°

ALUMINIO

B

N

7  
W

467  
Lm

3 000 K  
Cálido



**AT3073B**



**AT3073OB**



**AT3073CB**



**AT3073DB**



12  
W

811  
Lm

3 000 K  
Cálido



**AT3123B**





**AT3123OB**



**AT3123CB**




**AT3123DB**

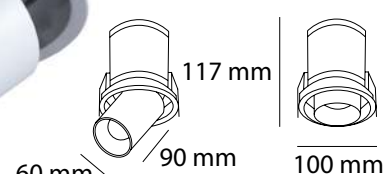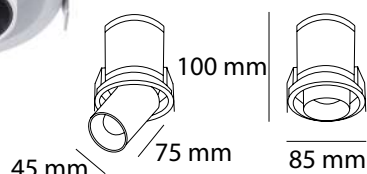

Extraíble  
Removable

12 W

| H(m) | Ena(lx) | D/B(m) |
|------|---------|--------|
| 1    | 2513    | 0.460  |
| 2    | 628.30  | 0.920  |
| 3    | 279.25  | 1.380  |
| 4    | 157.08  | 1.841  |
| 5    | 100.53  | 2.301  |



REFLECTORES  
DISPONIBLES:  
AVAILABLE  
REFLECTORS:

PARA / TO  
**AT3073 O/C/D B/N**

**AA15307**  
⦿ Reflector 15°

**AA35307**  
⦿ Reflector 35°

PARA / TO  
**AT3123 O/C/D B/N**

**AA15312**  
⦿ Reflector 15°

**AA35312**  
⦿ Reflector 35°

PARA / TO  
**AT32253 O/C/D B**

**AA153225**  
⦿ Reflector 15°

**AA353225**  
⦿ Reflector 45°

7 W 467 Lm 3 000 K  
Cálido

● AT3073N

on  
off

● AT3073ON


0-10  
V

● AT3073CN

TRIAC

● AT3073DN

DALI

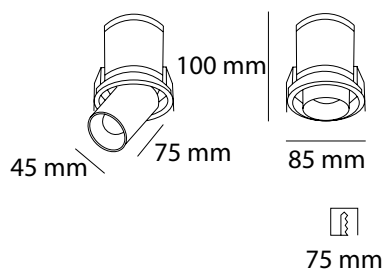

12 W 811 Lm 3 000 K  
Cálido

● AT3123N

on  
off

● AT3123ON


0-10  
V

● AT3123CN

TRIAC

● AT3123DN

DALI

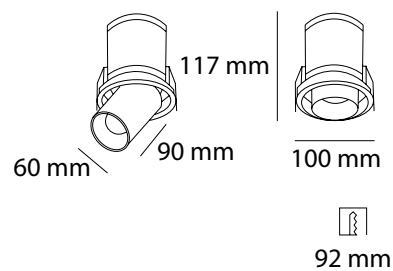

4 000 K  
Neutro

VERSIÓN EN 4000K BAJO PEDIDO  
4000K OPTION ON DEMAND

25 W 2111 Lm 3 000 K  
Cálido

○ AT32253

on  
off

○ AT32253O

0-10  
V

○ AT32253C3

TRIAC

25 W 2111 Lm 3 000 K  
Cálido

○ AT32253B



on  
off

○ AT32253OB

0-10  
V

○ AT32253CB

TRIAC

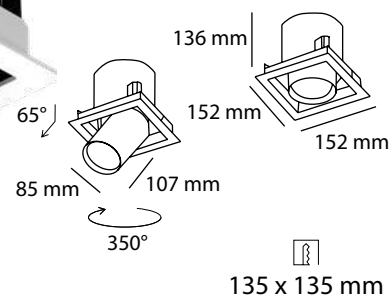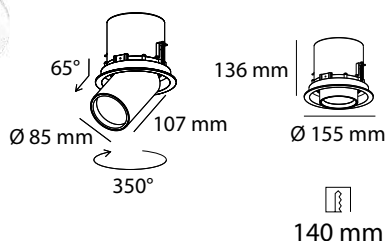

4 000 K  
Neutro

VERSIÓN EN 4000K BAJO PEDIDO  
4000K OPTION ON DEMAND

