



# YFTW2008DL, Covered Twin Ferrule For 20 AWG

By Burndy  
Catalog # [YFTW2008DL](#)

Covered Twin Ferrule For 20 AWG.

### Features

- Made of electrolytic copper, tin plated
- Smooth funnel entry to make wire insertion easier
- Secure contacting even after multiple reconections
- Long-term contact resistance
- No fraying of strands
- No breakage of wire strands when wire is bent, under stress, or in vibration environment
- UL listed per UL486F requirements
- RoHS Compliant

### Application


For Use On Copper Conductor

### General

Catalog Number	YFTW2008DL
Connector Type	End Termination
EU RoHS Indicator	Yes
Insulation	Y
Material	Copper
Plated	Y
Plating Type	Tin - Electro Plated
Sub Brand	FERRULES
Type	Bootlace Ferrule
UPC	621945623033

### Dimensions

Dimension - D inch	0.08 in
Dimension - D1 inch	0.07 in
Dimension - D2 inch	0.20 in

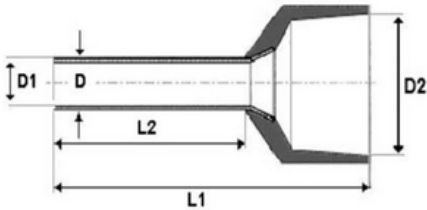

Dimension - Length Overall 0.59 in  
inch

### Conductor Related

Conductor - Copper Solid Size	20 AWG
Conductor - Copper Str Size	20 AWG
Conductor Size	20 AWG

### Certifications And Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - Industry Standards	UL486
Met	
Standards - RoHS Compliance	CM
Status	
UL Listed	Yes

### Logistics

Carton Quantity	500
Minimum Pack Quantity	500

### Product Assets

[Catalogs - BURNDY Master Catalog - Section B - Small Compression](#)  
[Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)  
[Interactive Catalog - BURNDY Full-Line Digital Catalog](#)  
[Sales Drawings - 50111876](#)  
[Specifications - YFTW2008DL](#)



A Hubbell brand