




Controladores monocromáticos y RGB



SR-2812-US3
Controlador RGBW touch para sistema DMX 512

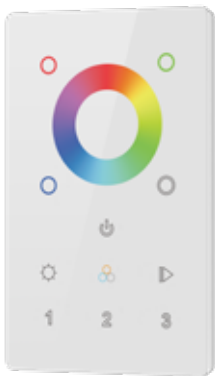

EX5
Controlador touch DMX 512 monocromatico preconfigurado con 4 canales



AMPL-DMX-RGB
Amplificador con protocolo DMX512 para luminarias RGB



SR-2102B
Decodificador protocolo DMX512 para luminarias RGBW



WIFI-101-DMX4
Regulador LED WiFi DMX 512

PRODUCTO	TEMPERATURA DE COLOR	 VOLTS	 POTENCIA	 LUMENS/M
COB-IP66-BS	Blue sky	100 - 240 V~	35 W	Variable
COB-IP66-GY	Golden yellow 	100 - 240 V~	35 W	Variable
REFLED-C/17W/RGB/N	RGB	100 - 240 V~	17 W	-
REFLED-C/17W/30/N	Blanco Cálido 	100 - 240 V~	17 W	780 lm
REGLED-48W-RGBW	RGB	100 - 240 V~	48 W	Variable
REGLED-48W/30/N	Blanco Cálido 	100 - 240 V~	48 W	3300 lm
SR-2812-US3	-	100 - 240 V~	-	-
EX5	-	100 - 240 V~	-	-
AMPL-DMX-RGB	N/A	12 V~ Requiere driver (no incluido)	-	N/A
SR-2102B	N/A	12 - 36 V	4x(6-180)W	N/A
WIFI-101-DMX4	N/A	12 - 24 v	-	N/A