



CS8269

50 Amp, 250 Volt, Black & White Locking Flush Mount
Receptacle, Industrial Grade

50Amp, 250V AC, Non-NEMA, 2P, 3W, Black & White Locking
Flush Mount Receptacle, Industrial Grade, Grounding, California-
Style(CS) – BLACK

- One piece contacts reduce friction and overheating
- Unique cord clamp accepts wide range of cord sizes
- Rugged nylon construction resists impact, sunlight, chemicals, and rough use
- Industry exclusive limited lifetime warranty

UPC Code : 078477326084

Country Of Origin : Mexico

NEMA : Non-NEMA

Technical Information

Electrical Specifications

Amperage : 50 A

Current Interrupting : Certified
for current interrupting at full
rated current

Dielectric Voltage Withstand :
2000V minimum per UL 498

Grounding : Grounding

Maximum Working Voltage :
250V as rated

Pole : 2

Temperature Rise : Max 30°C
temp rise at full-rated current
after 150 cycles of OL at 150%
rated DC current

Voltage : 250 VAC

Wire : 3

Environmental Specifications

Environment : Dry

Flammability : Rated HB or
better UL94

Operating Temperature : -40°
C to 75°C

Material Specifications

Assembly Rivets : SS 302/304

Back Cover : Reinforced Nylon

Body and Contract Carrier :
Reinforced Nylon

Body Material : Impact
Modified Nylon

Box Terminal : 0.062inch thick
Copper

Center Pin : SS 302/304

Color : Black

**Connector Contact - Binding
Plate :** 0.100inch thick Brass

Mechanical Specifications

Product ID : Ratings and
Catalogue No. molded into face

Terminal Accom. : #10min to
#6max AWG Solid or Stranded
Wire (Stranded Wire for Ground
only)

Terminal ID : X, W, Y, Z and
Green for ground

Connector Contact - Spring :

0.041inch thick Brass

Contact Rivet : Brass**Face Module : Reinforced**

Nylon

Mounting Screws : SS 302/304**Mounting Strap : Single piece**

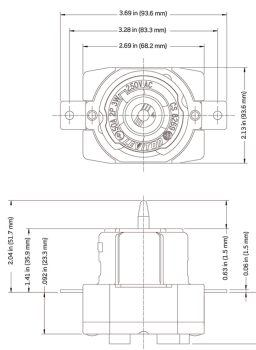
SS 302/304

Shroud : .062inch thick Nickel

Plated Steel

Terminal Set Screw : SS 302

/304

Product Features**Brand :** Black and White**Color :** Black**Device Type :** Locking
Receptacle**NEMA :** Non-NEMAStandards and Certifications**CSA C22.2 No. 42 :** File
152105**NOM :** 057**RoHS :** Compliant**UL 498 :** File E13399**Warranty :** Limited Lifetime
Warranty**Dimensional Drawing****SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.