



## 5657-2I

15 Amp, 120/277 Volt, Decora Plus Rocker Double-Throw Ctr-OFF Momentary Contact Single-Pole AC Quiet Switch, Commercial Spec Grade, Self Grounding, Back & Side Wired, - Ivory


Decora Plus devices combine designer styling with all the benefits of rugged Commercial Grade construction. The robust product offering includes: single pole, double pole, 3 and 4-way switches, momentary and maintained contact switches, as well as pilot light and illuminated switches.

Color :  Ivory

UPC Code : 078477789667

Country Of Origin : Mexico

### Available Colors :

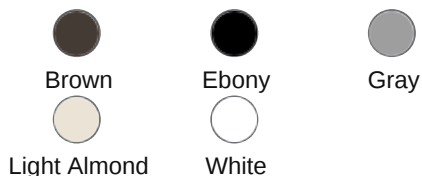

### Technical Information

#### AC Horsepower Ratings

**HP Rating :** 1/2HP-120V 2HP-240V-277V

**Max. Amperage :** 12 Amp

#### Electrical Specifications

**Amperage :** 15 A

**Dielectric Voltage :**  
Withstands 1500V for 1 minute

**Endurance :** 30,000 cycles minimum

**Grounding :** Self-Grounding

**Overload UL20 Test :** 100 cycles of OL at 4.8 times rated current

**Temperature Rise :** Maximum 30 degrees C rise

**Voltage :** 120/277 VAC

#### Environmental Specifications

**Flammability :** Rated V-2 per UL 94

**Operating Temperature :** -40° C to 65°C

#### Material Specifications

**Actuator Material :**  
Thermoplastic

**Body Material :** Thermoplastic

**Color :** Ivory

**Strap Material :** Steel

#### Mechanical Specifications

**Product ID :** Stamped on Strap

**Screw Terminal Torque :** 14-18 in-lbs

**Terminal Accom. :** 14-#10 AWG back wired; #14-#12 AWG side wired

**Terminal ID :** Brass-Hot Black-Hot White-Neutral Green-Gnd

**Termination :** Back or Side Wire

#### Product Features

**Brand :** Decora Plus

**Color :** Ivory

**Device Type :** Rocker Switch

**Feature :** Momentary Contact CTR OFF

**Function :** Single-Pole Double-Throw

**Grade :** Commercial Specification Grade

**Grounding :** Self-Grounding

**HP Rating :** 1/2HP-120V 2HP-240V-277V

**Voltage :** 120/277 VAC

Standards and Certifications

**ANSI :** C-73

**CSA C22.2 No. 111 :** File #152105

**NEMA :** WD-1 & WD-6

**NOM :** 057

**UL Standard :** UL 20

**Warranty :** 10-Year Limited

**SPECIFICATION SUBMITTAL**

|                                                                   |                                                   |
|-------------------------------------------------------------------|---------------------------------------------------|
| <div>JOB NAME:<div></div></div> <div>JOB NUMBER:<div></div></div> | <div>CATALOG NUMBERS:<div></div><div></div></div> |
|-------------------------------------------------------------------|---------------------------------------------------|

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts](http://www.leviton.com/international/contacts)

**© 2024 Leviton Manufacturing Co., Inc.**