




Color :  Ivory

UPC Code : 078477045312

Country Of Origin : Mexico

NEMA :  5-20R

Available Colors :

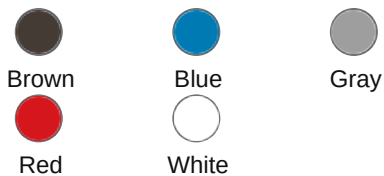

8380-I

20 Amp, 125 Volt, Decora Plus Surge Protective Duplex Receptacle Outlet, Heavy Duty Hospital Grade

Decora Plus Surge Protective Duplex Receptacle Outlet, Heavy-Duty Hospital Grade, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire - Ivory

Leviton's Surge Protection Devices can be used individually or as part of a coordinated application strategy, to protect sensitive electronic equipment, in industrial, commercial and residential locations, from the stress and degradation inflicted by voltage transients. Leviton Surge Protection Devices are compliant with UL 1449 Standards. Leviton's outstanding Surge Protection Devices divert damaging voltage transients, or surges, away from electronic equipment. Transients are diverted away from sensitive micro circuitry, providing protection against catastrophic failure, costly downtime and data disruptions.

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1 HP

Electrical Specifications

Amperage : 20 A

Current Limiting : Full Rated Current

Dielectric Voltage :
Withstands 2000V per UL498

Pole : 2

Temperature Rise : Max 30C
after 250 cycles OL at 200
percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Operating Temperature : -40°
C to 60°C

Material Specifications

Body Material : Nylon

Clamp Nuts : Zinc-Plated Steel

Face Material : Nylon

Grounding Screw : Brass-
Plated Steel

Line Contacts : Brass Triple-
Wipe

Shutter Mechanism : Delrin®
Acetal

Terminal Screws : Brass-
Plated Steel

Yoke : Zinc-Plated Steel

Mechanical Specifications

Performance Data

Product ID : Ratings are permanently marked on device

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Termination : Back or Side Wire

Torque Range : 14-16 inch pounds

Diagnostics : Indicator Light & Audible Alarm

Joules Rating : 720

MCOV : 150V rms

Maximum Surge Current, Per Mode (Per Phase) : 27kA (L-N: 18kA, L-G:9kA)

Noise Rejection : -30dB at 500kHz-30MHz

Nominal Discharge Current Rating : 3kA

Short Circuit Current Rating : 5kA

VPR : L-N: 600V, L-G: 700V, N-G: 600V

Product Features

Body Material : Nylon

Brand : Decora Plus

Color : Ivory

Device Type : Duplex Receptacle Outlet

Function : Surge Protective

Grade : Heavy-Duty Hospital Grade

NEMA : 5-20R

Warranty

Warranty : 5-Year Limited

Standards and Certifications

ANSI : C-73


Agency Certifications : UL 498, UL 1449 3rd Edition Listed and CSA C22.2 Certified Type 3

NEMA : WD-6

NOM : 057

UL498HG : File E13399

Wiring Diagram



SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.