




Color :  Black

UPC Code : 078477837030

Country Of Origin : Mexico

NEMA :  5-15R

Available Colors :

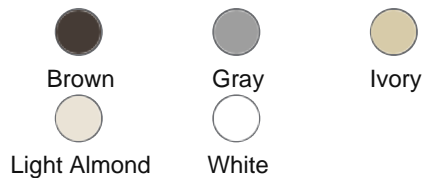

16252-E

15 Amp Decora Plus Duplex Receptacle/Outlet, Industrial Grade, Self-Grounding

Decora Plus Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 15 Amp, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - Black

Leviton's line of Heavy-Duty Specification Grade receptacles are designed and manufactured to withstand the most demanding environments. Available in a wide variety of configurations, including isolated ground, tamper-resistant, etc., these Commercial Grade devices are the electrical contractor's choice for use in hotels, schools, hospitals and commercial office buildings.

Technical Information

AC Horsepower Ratings

Amperage : 15 A

At Rated Voltage : 1/2 HP

Current Limiting : Full Rated Current

Dielectric Voltage :
Withstands 3000V min

Grounding : Self-Grounding

Pole : 2

Temperature Rise : Max 30°C
temperature rise at full rated current

Voltage : 125 VAC

Wire : 3

Electrical Specifications

Amperage : 15 A

Current Limiting : Full Rated Current

Dielectric Voltage :
Withstands 3000V min

Flammability : Rated V-2 per UL 94

Grounding : Self-Grounding

Operating Temperature : -40° C to 60°C

Pole : 2

Temperature Rise : Max 30°C
temperature rise at full rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Body Material : PBT Polyester Blend

Clamp Nuts : Zinc-Plated Steel

Color : Black

Face Material : PBT Polyester Blend

Flammability : Rated V-2 per UL 94

Ground Clips : Brass-Plated

Grounding Screw : #8 Hex Head, Triple-Drive Brass

Material Specifications

Body Material : PBT Polyester Blend

Color : Black

Face Material : PBT Polyester Blend

Ground Clips : Brass-Plated

Grounding Screw : #8 Hex Head, Triple-Drive Brass

Line Contacts : 0.030" Phosphor Bronze

Line Contacts : 0.030"
Phosphor Bronze

Operating Temperature : -40°
C to 60°C

Strap Material : Steel
(Galvanized G60)

Terminal Screws : #8 Triple-
Drive Brass

Product ID : Ratings are
permanently marked on device

Strap Material : Steel
(Galvanized G60)

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot,
Green-Ground, Silver-Neutral

Terminal Screws : #8 Triple-
Drive Brass

Termination : Back and Side
Wire

Mechanical Specifications

Brand : Decora Plus

Color : Black

Device Type : Duplex
Receptacle Outlet

Feature 4 : Smooth Face

Grade : Commercial
Specification Grade

NEMA : 5-15R

Product ID : Ratings are
permanently marked on device

Screw Terminal Torque : 14-
18 in-lbs

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot,
Green-Ground, Silver-Neutral

Termination : Back and Side
Wire

Standards and Certifications

ANSI : C-73

Applicable Standards : UL
498, Fed Spec W-C-596, CSA
C22.2 No.42

At Rated Voltage : 1/2 HP

Certification/Listing : cULus,
NON-ANCE

RoHS : RoHS Compliant

Warranty : 10-Year Limited

Product Features

ANSI : C-73

Brand : Decora Plus

CSA C22.2 No. 42 : File LR-406

Device Type : Duplex
Receptacle Outlet

Feature 4 : Smooth Face

Grade : Commercial
Specification Grade

NEMA : 5-15R

NOM : 057

UL498 : File E13399

Warranty : 10-Year Limited

Patents *

CA2483480

MX321216

US8684771

MX257790

US6743029

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.