




Color :  Ivory

UPC Code : 078477381915

Country Of Origin : United States

NEMA :  5-15R

Available Colors :

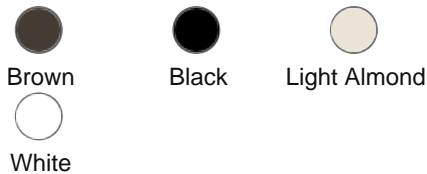

T5320-I

15 Amp Tamper-Resistant Duplex Outlet/Receptacle, Grounding, Ivory

15 Amp, 125 Volt, NEMA: 5-15R, Pole: 2, 3-Wire, Tamper-Resistant, Duplex Receptacle/Outlet, Straight Blade, Grounding, Quickwire Push-In & Side, Standards and Certifications: UL/CSA, Warranty: 2 Year Limited, NEC compliant – Ivory

- **SAFE** – Tamper-resistant offers protection from electrical shocks
- **DURABLE** – Impact-resistant thermoplastic nylon construction
- **EASY** – Quickwire push-in and side wiring for easy installation
- **CONVENIENT** – TR symbol on strap assures they meet the latest NEC requirements

Technical Information

Product Features

Amperage : 15 A

Blade Type : Straight Blade

Color : Ivory

Device Type : Duplex Receptacle Outlet

Feature : Tamper-Resistant

Grounding : Grounding

NEMA : 5-15R

Pole : 2

Terminal Accom. : Side wiring accepts #10, #12 and #14 AWG copper (CU) or #10 and #12 copper clad (CC) wire, Quickwire push-in terminals accept #14 AWG solid copper (CU) wire only

Termination : Quickwire Push-In & Side

Torque Range : 14 – 18 in.-lbs

Voltage : 125 VAC

Warranty : 2-Year Limited

Wire : 3

Standards and Certifications

CSA C22.2 No. 42 : File 152105; Class 6233-01

NOM : NOM Certified

UL 498 : File E13399


Features and Benefits

- Terminal screws accept #10, #12 and #14 AWG copper (CU) or #10 and #12 copper clad (CC) wire
-

Quickwire push-in terminals accept #14 AWG solid copper (CU) wire only

- Shallow depth for maximum wiring room
- Heavy-gauge zinc-plated steel mounting strap
- Additional material added to strap to help reinforce and prevent excessive bending of the break-off tabs
- Shutter mechanism inside the receptacle blocks access to the contacts unless a two-prong plug is inserted, helping ensure hairpins, keys, etc., will be locked out
- TR symbol on strap assures they meet the latest NEC requirements
- Ultrasonic welding, heavy-duty construction offers long, trouble-free service life
- Limited 2-year warranty

Wiring Diagram



SPECIFICATION SUBMITTAL

<p>JOB NAME:</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div> <p>JOB NUMBER:</p> <div style="border: 1px solid black; height: 20px; width: 100%;"></div>	<p>CATALOG NUMBERS:</p> <table border="1" style="width: 100%; border-collapse: collapse;"><tr><td style="width: 50%; height: 20px;"></td><td style="width: 50%; height: 20px;"></td></tr><tr><td style="height: 20px;"></td><td style="height: 20px;"></td></tr></table>				

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.