




IP20 - IK04



Dunna



Maintained LED / Permanente LED



The DUNNA range reflects the experience obtained from manufacturing emergency lighting for almost half a century; it is one of our oldest and most successful luminaires but is constantly developing. The latest LED technology and an avant-garde redesign to adapt it to modern times.

La familia DUNNA refleja la experiencia adquirida en la fabricación de luminarias de emergencia durante casi medio siglo; es una de nuestras luminarias más antiguas y exitosas pero en constante evolución a la que se le ha aplicado la última tecnología LED y un rediseño vanguardista para adaptarla a los nuevos tiempos.

Non maintained LED / No permanente LED

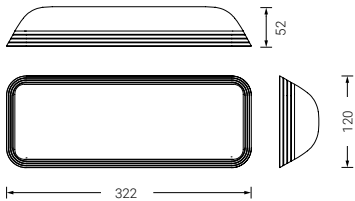

For ceiling or wall
mounting

Para adosar
a techo o pared

- For ceiling or wall mounting.
- For ceiling recesses via an accessory.
- IP65 via an accessory.
- Modes of operation:
 - Non maintained.
 - Maintained.
- Housing made from self-extinguishing ABS. Polycarbonate diffuser.
- Light source: LED.
- Batteries: NiCd (high temperature).
- Charging LED.
- Test button.
- Charging time 24 hours.
- Power: EN 60598-2127 / 127 Vac • 60 Hz (24 Vdc in the version for the central battery system).

- Para adosar a techo o pared.
- Para empotrar a techo a través de accesorio.
- IP65 a través de accesorio.
- Modos de funcionamiento:
 - No permanente.
 - Permanente.
- Envolvente fabricada en ABS autoextinguible. Difusor de Policarbonato.
- Fuente de luz: LED.
- Baterías: NiCd (alta temperatura).
- Led de carga.
- Botón de test.
- Tiempo de carga 24 horas.
- Alimentación: 127 Vca • 60 Hz (24 Vcc en versión para central de baterías).

Light range	Rango lumínico	45-620 lm.
Autonomy	Autonomía	1.5 h.
Autonomous fittings: standard, selftest and DALI centralised self-test.	Equipo autónomo: estándar, autotest y autotest centralizado DALI.	
Fittings supplied via the central source at 127 Vac or 24 Vdc	Equipo alimentado por fuente central a 127 Vca o 24 Vcc.	
Finishes	Acabados	○ White / Blanco

⊖ Voltaje 127V-60hz

MODELS MODELOS

NO PERMANENTE MULTILED

REF.	ACABADO	COMUNICACIÓN	LÚMENES (lm)	AUTONOMÍA (HORAS)	PESO (KG)	
D-60LV	Blanco	—	60 lm	1.5 h	0,6	NORMAL
D-150LV	Blanco	—	140 lm	1.5 h	0,6	NORMAL
D-300LV	Blanco	—	350 lm	1.5 h	0,6	NORMAL
DA-100LV	Blanco	—	135 lm	1.5 h	0,6	AUTOTEST

ACCESSORIES ACCESORIOS

Blade diffuser Difusor de banderola	Recessed frames Marcos empotrables	Recessed frames with blade diffuser Marcos empotrables con difusor de banderola	Tube adapter Adaptador tubo	Waterproof housing Envolventes estancas	Waterproof housing with blade diffuser Envolventes estancas con difusor de banderola
D-DB	D-MEL	D-DBEL	D-AT	D-MS	DM-DB
					
Fixing supports Soportes de fijación	Remote controls Telemandos	Pictograms Pictogramas			
U-SBL U-AV D-KS	S-TE S-TEA	Tipo N 150x90 mm			
		REF. N-L REF. N-R REF. N-SD   			
		Tipo LN 230x110 mm			
		REF. LN-L REF. LN-R REF. LN-SD   			
		Tipo PN 300x130 mm			
		REF. PN-L REF. PN-R REF. PN-SD   			

Detalle de Accesorios en Pag. 100