




2G11

ESPECIFICACIONES
Vida: 12 000-20 000 hrs.

CFL Pin Base DULUX L

Clave	Descripción	Potencia [W]	Flujo Luminoso Inicial [lm]	MOL [mm]	IRC	CCT [K]	Bulbo	Tipo de Base	Vida Promedio [h]	Estatus	Piezas por Caja
20595	FT18DL830RSECO	18	1 250	225	82	3 000	L	2G11	20 000	MTO	10
20593	FT18DL841RSECO	18	1 250	225	82	4 100	L	2G11	20 000	MTO	10
20581	FT36DL830ECO	36	2 900	415	82	3 000	L	2G11	12 000	MTO	10
20583	FT36DL841ECO	36	2 900	415	82	4 100	L	2G11	12 000	MTO	10
20584	FT40DL830RSECO	40	3 150	570	82	3 000	L	2G11	20 000*	MTS	10
20585	FT40DL835RSECO	40	3 150	570	82	3 500	L	2G11	20 000*	MTO	10
20586	FT40DL841RSECO	40	3 150	570	82	4 100	L	2G11	20 000*	MTS	10
20576	FT40DL850RSECO	40	3 150	570	82	5 000	L	2G11	20 000*	MTS	10
82247	DULUX L FT55DL/840/PH 55 2G11 BF	55	4 850	535	82	4 000	L	2G11	12 000	MTS	10
20590	FT55DL830ECO	55	4 800	535	80	4 100	L	2G11	12 000	MTS	10

*El promedio de vida con un balastro de arranque instantaneo es de 15,000 hrs.

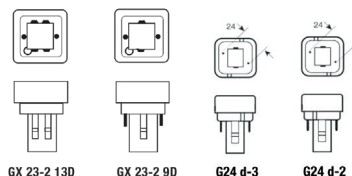

GX 23-2 13D

GX 23-2 9D

G24 d-3

G24 d-2

ESPECIFICACIONES
Vida: 10 000 hrs.

CFL Pin Base DULUX D

Clave	Descripción	Potencia [W]	Flujo Luminoso Inicial [lm]	MOL [mm]	IRC	CCT [K]	Bulbo	Tipo de Base	Vida Promedio [h]	Estatus	Piezas por Caja
21122	OGDULUXD9W41827	9	525	86	82	2 700	D	G23-2	10 000	MTS	50
20707	OGDULUXD9W21840	9	525	86	82	3 500	D	G23-2	10 000	MTS	50
20729	OGDULUXD13W41827	13	780	95	82	2 700	D	GX23-2	10 000	MTS	50
21118	CF13DD835ECO	13	780	95	82	3 500	D	GX23-2	10 000	MTS	50
20774	OGDULUXD13W21840	13	780	95	82	4 100	D	GX23-2	10 000	MTS	50
21111	CF18DD841ECO	18	1 150	130	82	4 100	D	G24D-2	10 000	MTO	50
21113	CF26DD827ECO	26	1 710	149	82	2 700	D	G24D-3	10 000	MTO	50
21114	CF26DD835ECO	26	1 710	149	82	3 500	D	G24D-3	10 000	MTO	50
20122	CF26DD841ECO	26	1 800	149	82	4 100	D	G24D-3	10 000	MTS	50