



LÁMPARAS FLUORESCENTES LINEALES

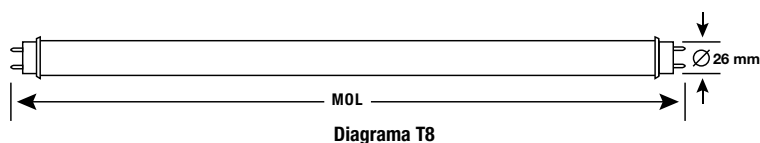

ESPECIFICACIONES

Vida: 24 000-40 000 hrs.

OCTRON® T8 ESTANDAR (serie 800)

Clave	Descripción	Potencia [W]	Flujo Luminoso Inicial [lm]	MOL [mm]	IRC	CCT [K]	Bulbo	Tipo de Base	Vida Promedio [h]	Estatus	Piezas por Caja
22290	F017835ECO	17	1 350	604	>80	3 500	T8	G13	28 000	MTS	30
22122	F017841ECO	17	1 350	604	>80	4 100	T8	G13	28 000	MTS	30
22139	F025835ECO	25	2 150	909	>80	3 500	T8	G13	28 000	MTS	30
22140	F025841ECO	25	2 150	909	>80	4 100	T8	G13	28 000	MTS	30
22283	F032830ECO	32	2 950	1 214	>80	3 000	T8	G13	28 000	MTS	30
22284	F032835ECO	32	2 950	1 214	>80	3 500	T8	G13	28 000	MTO	30
21755	F032841ECO	32	2 950	1 214	>80	4 100	T8	G13	28 000	MTS	30
21943	F032850ECO	32	2 950	1 214	>80	5 000	T8	G13	28 000	MTS	30
21974	F032865	32	2 950	1 214	>80	6 500	T8	G13	28 000	MTS	30
*22594	F032SKYWHITECO	32	2 650	1 214	>80	8 000	T8	G13	40 000	MTO	30
22146	F040841ECO	40	3 650	1 524	>80	4 100	T8	G13	30 000	MTS	30
22147	F096830ECO	59	5 900	2 338	>80	3 000	T8	G13	24 000	MTS	24
22148	F096835ECO	59	5 900	2 338	>80	3 500	T8	G13	24 000	MTS	24
22112	F096841ECO	59	5 900	2 338	>80	4 100	T8	G13	24 000	MTS	24
22120	F096850ECO	59	5 900	2 338	>80	5 000	T8	G13	24 000	MTS	24

*Disponibilidad hasta agotar inventario.

OCTRON® T8 - LOW COST

Clave	Descripción	Potencia [W]	Flujo Luminoso Inicial [lm]	MOL [mm]	IRC	CCT [K]	Bulbo	Tipo de Base	Vida Promedio [h]	Estatus	Piezas por Caja
83342	F032W84125CS	32	2 820	1 214	>80	4 100	T8	G13	14 000	MTS	25
83343	F032W85025CS	32	2 720	1 214	>80	5 000	T8	G13	14 000	MTS	25
83344	F032W86525CS	32	2 720	1 214	>80	6 500	T8	G13	14 000	MTS	25