





Safety switch, heavy duty, non fusible, 200A, 3 wire, 3 pole, 150HP, 600V AC/DC, NEMA 1

HU364

! Discontinued on: Jan 31, 2024



Product availability: Stock - Normally stocked in distribution

Main

Single Throw Safety Switch	
Heavy duty	
Heavy application	
Non-fusible disconnect	
None	
3 phase	
3	
200 A	
600 V AC/DC	
NEMA 1 steel	
15 hp at 240 V AC 50-60 Hz for 1 phase motors 60 hp at 240 V AC 50-60 Hz for 3 phase motors 50 hp at 480 V AC 50-60 Hz for 1 phase motors 125 hp at 480 V AC 50-60 Hz for 3 phase motors 50 hp at 600 V AC 50-60 Hz for 1 phase motors 50 hp at 600 V AC 50-60 Hz for 1 phase motors 150 hp at 600 V AC 50-60 Hz for 3 phase motors 40 hp at 250 V DC 50 hp at 600 V DC	

Complementary

Mounting Type	Surface
Electrical Connection	Lugs
Wiring Configuration	3-wire
Wire Size	AWG 6250 kcmil copper or aluminium
Tightening Torque	275 lbf.in (31.07 N.m) 0.020.20 in² (13.3127 mm²) (AWG 6250 kcmil)
Depth	8.25 in (209.55 mm)
Width	18.5 in (469.90 mm)
Height	29 in (736.60 mm)
Net Weight	52.01 lb(US) (23.59 kg)

Environment

Certifications UL listed file E2875

Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Category	US10DE100008
Discount Schedule	0DE1
Gtin	785901505860
Returnability	No
Country Of Origin	US

Packing Units

_	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	8.20 in (20.828 cm)
Package 1 Width	19.30 in (49.022 cm)
Package 1 Length	30.70 in (77.978 cm)
Package 1 Weight	43.10 lb(US) (19.55 kg)
Unit Type Of Package 2	PAL
Number Of Units In Package 2	15
Package 2 Height	45.50 in (115.57 cm)
Package 2 Width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)
Package 2 Weight	650.00 lb(US) (294.835 kg)

Contractual warranty

Warranty 18 months



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


②	Reach Free Of Svhc	
⊘	Toxic Heavy Metal Free	
⊘	Mercury Free	
⊘	Rohs Exemption Information Yes	
Ø	Pvc Free	


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant EU RoHS Declaration
China Rohs Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Dimensions Drawings

Approximate Dimensions

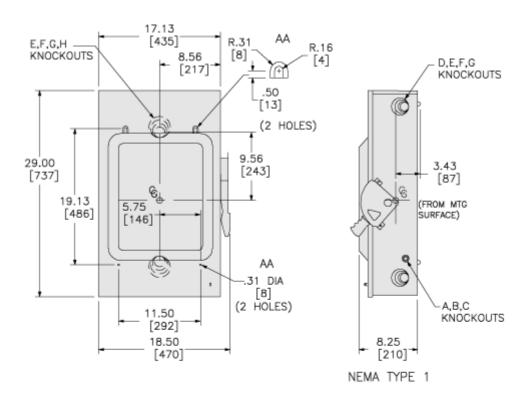



	KN	OCKOUTS	5	
SYMBOL	CONDUIT SIZE		DIAMETER	
STMBUL	IN	MM	IN	MM
A	.50	13	.88	22
В	.75	19	1.13	29
С	1.00	25	1.38	35
D	1.25	32	1.75	45
Ε	1.50	38	2.00	51
F	2.00	51	2.50	64
G	2.50	64	3.00	76
Н	3.00	76	3.50	89