




Color :  White

UPC Code : 078477133552

Country Of Origin : Mexico

NEMA :  5-15R

Available Colors :

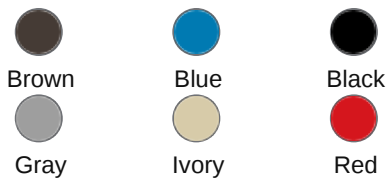

5262-SGW

15 Amp Duplex Receptacle/Outlet, Industrial Grade, Tamper-Resistant, Self-Grounding

Duplex Receptacle Outlet, Extra Heavy-Duty Industrial Specification Grade, Tamper-Resistant, Smooth Face, 15 Amp, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - White

ROHS Compliant : Yes

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1/2 HP

Electrical Specifications

Amperage : 15 A

Dielectric Voltage :
Withstands 2000V per UL498

Grounding : Self-Grounding

Pole : 2

Temperature Rise : Max 30C
after 250 cycles OL at 200
percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-2 per
UL 94

Operating Temperature : -40°
C to 75°C

Material Specifications

Body Material : Nylon

Face Material : Nylon

Ground Clips : Brass

Grounding Screw : Brass 8-32

Line Contacts : Triple-Wipe .
040" High Performance Brass
Alloy

Strap Material : Brass .050"

Terminal Clamp : Zinc-Plated
Steel

Terminal Screws : Brass 10-32

Mechanical Specifications

Product ID : Ratings are
permanently marked on device

Screw Terminal Torque : 14-
18 in-lbs

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot,
Green-Ground, Silver-Neutral

Product Features

Color : White

Device Type : Duplex
Receptacle Outlet

Feature : Tamper-
Resistant|Smooth Face

Grade : Extra Heavy-Duty
Industrial Specification Grade

NEMA : 5-15R

