




Color :  Gray

UPC Code : 078477233146

Country Of Origin : Please Contact Customer Service

NEMA :  5-15R

Available Colors :

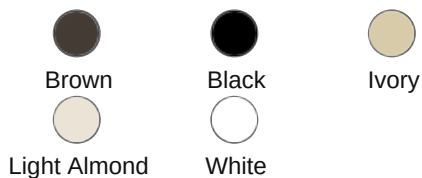

5325-GY

15 Amp Decora Duplex Outlet/Receptacle, Grounding, Gray

15 Amp, 125 Volt, NEMA 5-15R, 2-Pole, 3-Wire, Decora Duplex Receptacle, Straight Blade, Residential Grade, Grounding, Quickwire Push-In & Side Wired, Steel Strap - Gray

- EASY - Quick wire push-in and side wiring for easy installation
- DURABLE - Impact-resistant thermoplastic nylon construction
- CONVENIENT - Shallow depth for maximum wiring room
- COMPATIBLE - For use with Leviton Decora wallplates

Technical Information

Product Features

Amperage : 15 A

Body Material : Thermoplastic

Color : Gray

Face Material : Thermoplastic

Grounding : Grounding

NEMA : 5-15R

Pole : 2

Strap Material : Steel

Terminal Accom. : Side wiring accepts #10, #12 and #14 AWG copper (CU) or #10 and #12 copper clad (CC) wire, Quickwire push-in terminals accept #14 AWG solid copper (CU) wire only.

Termination : Quickwire Push-In & Side

Torque Range : 14 – 18 in.-lbs

Type : Duplex Receptacle

Voltage : 125 VAC

Warranty : 1-Year Limited

Wire : 3

Standards & Certifications

CSA C22.2 No. 42 : File 152105; Class 6233-01

NOM : NOM Certified

UL 498 : File E13399

Features and Benefits

- Terminal screws accept #10, #12 and #14 AWG copper (CU) or #10 and #12 copper clad (CC) wire
- Quickwire push-in terminals accept #14 AWG solid copper (CU) wire only
- Shallow depth for maximum wiring room

